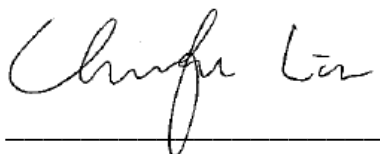


**Harvatek Surface Mount CHIP LEDs Approval Sheet****Model No.: HT-150HQ****Acknowledged by****Section Manager  
Production Engineering Dept.****Manager  
Production Engineering Dept.**

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 1/13

<b>INTRODUCTION</b>	<b>3</b>
<b>PRODUCT SPECIFICATION</b>	<b>4</b>
<b>LABEL SPEC.:</b>	<b>5</b>
PRODUCT FEATURE	7
ELECTRO-OPTICAL CHARACTERISTICS	7
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING	7
ABSOLUTE MAXIMUM RATINGS	7
CHARACTERISTICS	8
<b>PACKAGING TAPE, REEL, AND PACKING MODEL</b>	<b>9</b>
TAPE DIMENSION	9
REEL DIMENSION	9
PACKING MODEL	10
<b>PRECAUTION OF APPLICATION</b>	<b>10</b>
DESIGNING 1: SOLDERING PATTERN	10
DESIGNING 2: CIRCUIT LAYOUT	10
DESIGNING 3: ELECTRIC STATIC DISCHARGE (ESD) PROTECTION	11
DESIGNING 4: MAX RATING	11
DRY PACK	11
STORAGE	11
BAKING	12
REFLOW SOLDERING	12
REWORK	13
CLEANING	13
CAUTIONS OF PICK AND PLACE	13

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 2/13

**Introduction**

- *The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by HARVATEK for any infringements of intellectual property or other rights of the third parties which may result from it use.*
- *Harvatek is continually effort to improve the quality of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing HARVATEK products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such HARATEK products cause loss of human life, bodily injury or damage to property.*
- *The HARVATEK products listed in this document are intended for usage in general electronics (computer, personal equipment, office equipment, industrial robotics, domestic, etc...) These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.*
- *In developing your designs, please ensure that HARVATEK products are used within specified operating ranges as set forth in the most recent HARVATEK products specifications.*
- *Also, please keep in mind the precautions listed in this document.*

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 3/13

## Product Specification

	Specification	Material	Quantity
Iv	45-112.5 mcd @20mA/ Ta= 25° C Tolerance: ± 10%		
Lambda( $\lambda_D$ )	620-650 nm @20mA/ Ta= 25° C Tolerance: ± 0.5nm		
Vf	1.8 ~ 2.3V @20mA/ Ta= 25° C Tolerance: ± 0.05V		
Ir	< 100 $\mu$ A @ $V_R = 5$ V		
Resin	Milky Diffused	Epoxy resin	
Carrier tape	According to EIA 481-1A specs	Conductive tape	3000pcs per reel
Reel	According to EIA 481-1A specs	Plastic/ White	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel one bag
Carton	HT standard	Paper	Non-specified

Others:

Every mid-box will be loaded 5 reels. These 5 reels can be different in lot, Iv, lambda, or Vf. Every reel will have an independent label to identify its specification and the mid-box there will have a corresponding label post on it.




ESD protection for GaP and AlGaAs chips are still necessary even though they are safety in low static-electric discharge. Material in AlInGaP, GaN, or/and InGaN chips are **STATIC SENSITIVE device**. ESD protection shall be considered and taken in the initial design stage.

If manual work/process is needed, please ensure the device is well protective from ESD within all the process.

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 4/13

## Label Spec.:

<b>HARVATEK</b>			Date: yyyy/mm/dd 
CUSTOMER P/N: 			
HARVATEK P/N: 		QTY: PCS 	
LOT NO: 		QC	
IV BIN:	COLOR BIN:	VF:	

### ■ Customer P/N: To Be Defined

### ■ Harvatek P/N

**H T - 1 5 0 HQ**

Series Name	Emitting Color
HT-150: 3.2x1.6x1.1mm	HQ: Ultra Bright Red

### ■ Lot No.

1 2 3 4 5 6 7 8 9 10  
**P 1 2 2 3 0 A - D T**

Code 1	Code 2	Code 3	Code 4, 5	Code 6, 7	Code 9	Code 10
	Mfg. Year	Mfg. Month	Mfg. Date	Lots	Resin Color	Packaging
Internal Tracing Code	Z: 2000 1: 2001 2: 2002 3: 2003 .....	1: Jan. 2: Feb. .... 9: Sep. A: Oct. B: Nov. C: Dec.	1~31/ (30)	01~99, A,B,C...	D: Milky White	T: Taped Reel

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 5/13

■ **Iv Bin:**

Color	Bin Code	Spec. Range
Red	P	45-71.5mcd
	Q	71.5-112.5mcd

■ **Color Bin:**

Color	Bin Code	Spec. Range
Red	-	620-650nm

■ **Vf Bin:**

Color	Bin Code	Spec. Range
Red	-	1.8-2.3V

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 6/13

### Product Feature

#### Electro-Optical Characteristics

( $I_F$  @ 20mA,  $T_a$  25 °C)

Code for parts	Lighting Color	Material	$V_F(V)$		$\lambda(nm)$			$I_v(mcd)$
			typ	max	$\lambda_D$	$\lambda_P$	$\Delta\lambda$	Typ
HT-150HQ	Ultra Bright Red	AlinGaP	1.9	2.3	632	645	22	90

#### Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

Unit: mm Tolerance: +/-0.1

Outline Dim.	Soldering Pattern

1.Soldering terminal may shift in x, y direction.

#### Absolute Maximum Ratings

( $T_a$  25 °C)


Series	$P_d$ (mW)	$I_F$ (mA)	$I_{FP}$ (mA)	$V_R$ (V)	$T_{OP}$ (°C)	$T_{ST}$ (°C)
HT-150HQ	46	20	80**	5	-30~+80	-40~+85

\*\* Condition for  $I_{FP}$  is pulse of 1/10 duty and 0.1msec width


Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 7/13

### Characteristics


Forward Current vs. Ambient Temperature

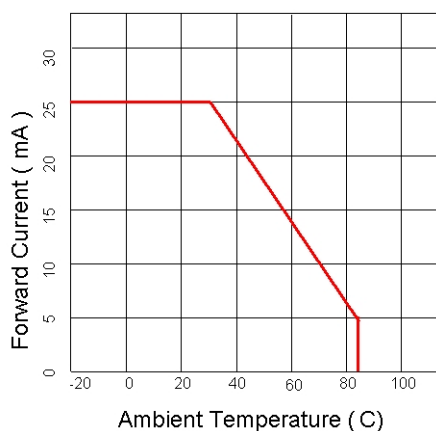

Forward Voltage vs. Forward Current

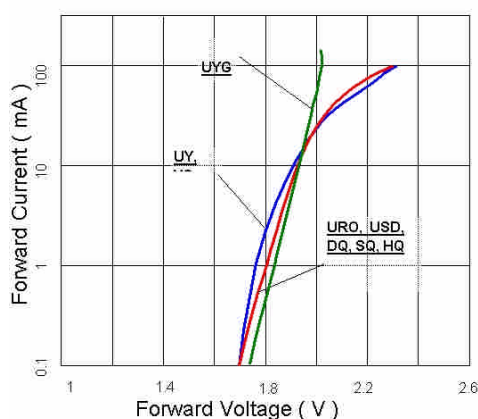


Relative Intensity vs. Forward Current

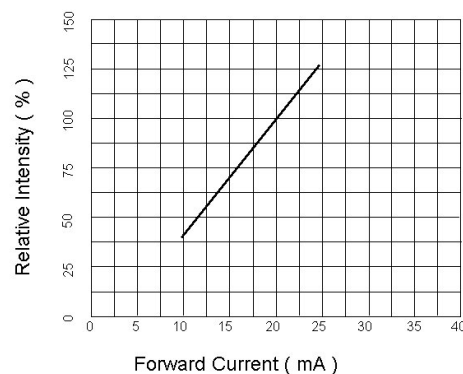


Relative Intensity vs. Ambient Temperature


Plused 20mA, 300us pulse, 10ms period

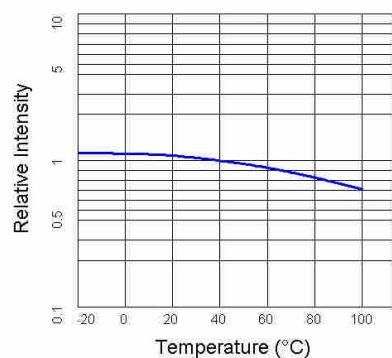


Relative Intensity vs. Wavelength

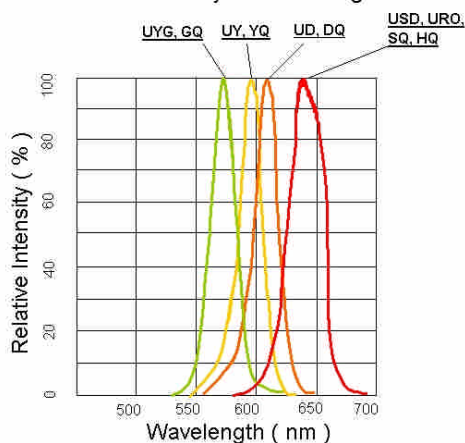

### Directive Characteristics

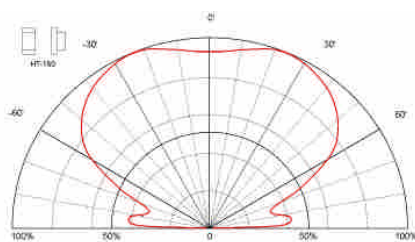


### Directive Characteristics

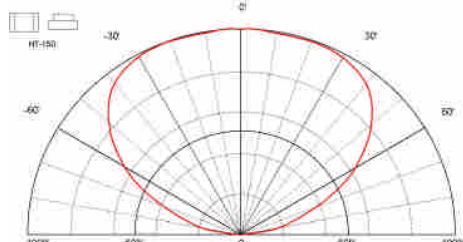

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 8/13




## Packaging Tape, Reel, and Packing Model Tape Dimension

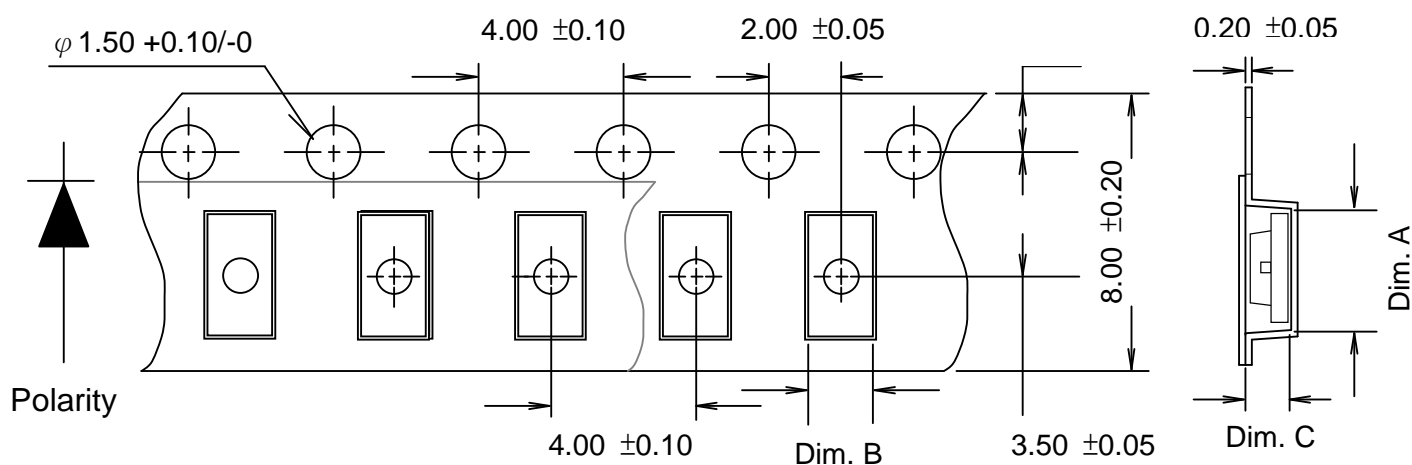

Part No.	Dim. A	Dim. B	Dim. C	Q'ty/Reel
HT-150	$3.50 \pm 0.10$	$1.88 \pm 0.10$	$1.27 \pm 0.10$	3K


Unit: mm

## Reel Dimension

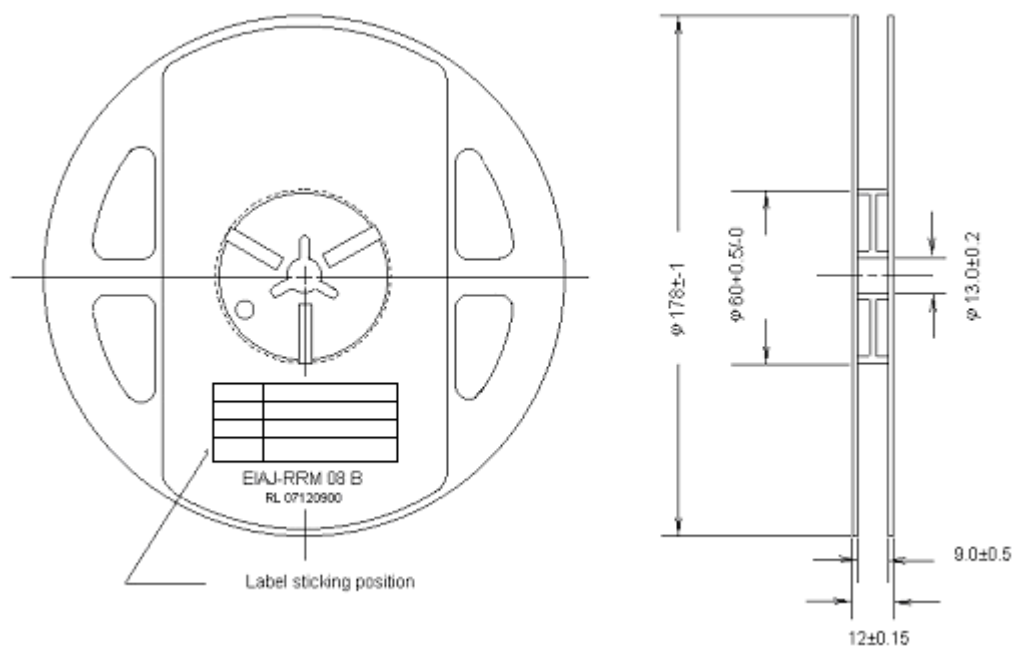

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 9/13

## Packing Model

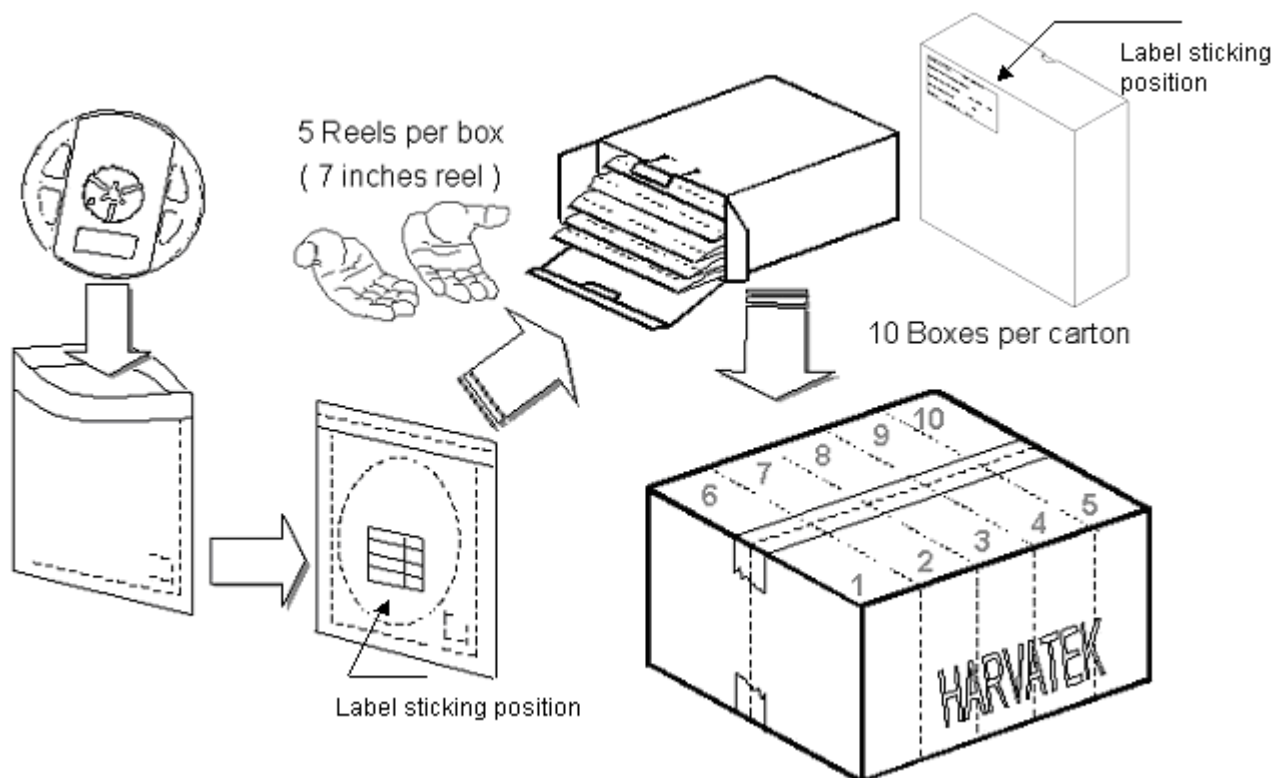

5 boxes per carton is available according to shipping quantity.

## Precaution of Application

### Designing 1: Soldering pattern

The dimensions of the recommended soldering pattern may not meet every user. Please confirm and study first before designing the soldering pattern in order to obtain the best performance of soldering.

### Designing 2: Circuit layout

Due to the circuit design is not available, assuming the LED are used in parallel and one resistor that is put in series in the circuit, it may not provide an effective current-limiting function to the LEDs due to each LED has own inherent resistance, maybe the resistance each other is different. Different inherent resistance will cause different current; the LED on the different path would be driven at different power. If one LED with a higher resistance, it would be dimmer than the others.

To solve this situation, a suitable resistor is put in series with each LED to limit the current disparity through the LED will be very useful.

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 10/13

## Designing 3: Electric Static Discharge (ESD) protection



ESD protection for GaP and AlGaAs chips are still necessary even though they are safety in low static-electric discharge. Material in AlInGaP, GaN, or/and InGaN chips are **STATIC SENSITIVE device**. ESD protection shall be considered and taken in the initial design stage.

If manual work/process is needed, please ensure the device is well protective from ESD within all the process.


## Designing 4: Max Rating

Any application should refer to the specifications of absolute maximum ratings.

## Dry Pack

Any SMD optical device, like this chip LED, is **MOISTURE SENSITIVE device**. Avoid absorbing moisture at any time during transportation or storage. Every reel will be packaged in the moisture barrier anti-static bag (Specific bag material will depend upon customers' requirement or option). And the bag is well sealed before shipment.

The package is the following:

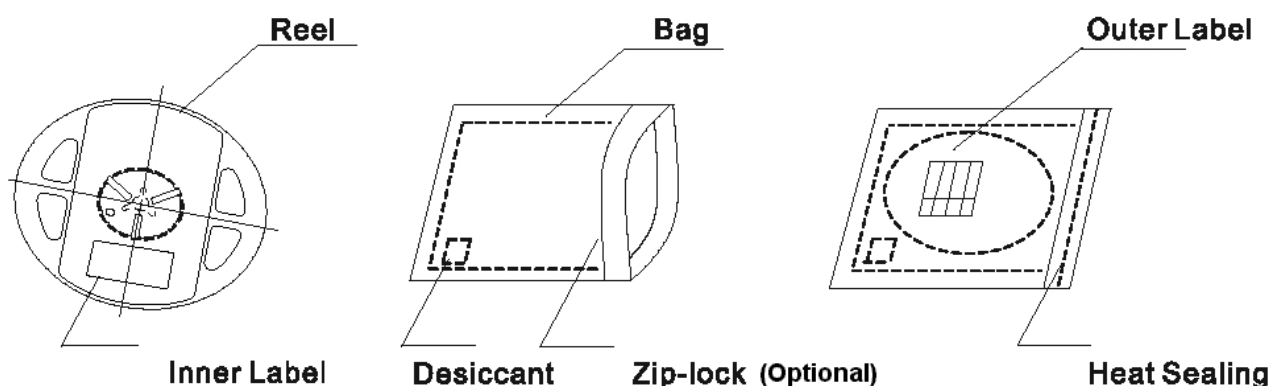

## Storage

It's recommended to store the products in the following conditions:

Humidity: 60 %RH Max.

Temperature: 5 °C ~30 °C (41°F~86 °F)

- 1 Shelf life in sealed bag: 12 month at <40 °C and <90%RH. (Base on aluminum laminated moisture barrier bag.)
- 2 After the bag is opened, devices that will be subjected to infrared reflow, vapor-phase reflow, or equivalent processing must be:
  - 2.1 Mounted within 72 hours at factory conditions of  $\leq 30^{\circ}\text{C}$  /60% RH, or
  - 2.2 Stored at  $\leq 20\%$  RH with zip-lock sealed.

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 11/13

## Baking


It's recommended to bake before soldering when the pack is unsealed after 15 days. The conditions are as followings:

- a)  $60 \pm 3^{\circ}\text{C} \times (12 \sim 24\text{hrs})$  and  $< 5\%$  RH, taped reel type
- b)  $100 \pm 3^{\circ}\text{C} \times (45\text{min} \sim 1\text{hr})$ , bulk type
- c)  $130 \pm 3^{\circ}\text{C} \times (15 \sim 30\text{min})$ , bulk type

## Reflow Soldering


- ◆ Recommend tin glue specifications:  
Melting temperature:  $178 \sim 192^{\circ}\text{C}$
- ◆ Never take next process until the component is cooled down to room temperature after reflow.
- ◆ The recommended reflow soldering profile (measuring on the surface of the LED resin) is following:

Lead Solder

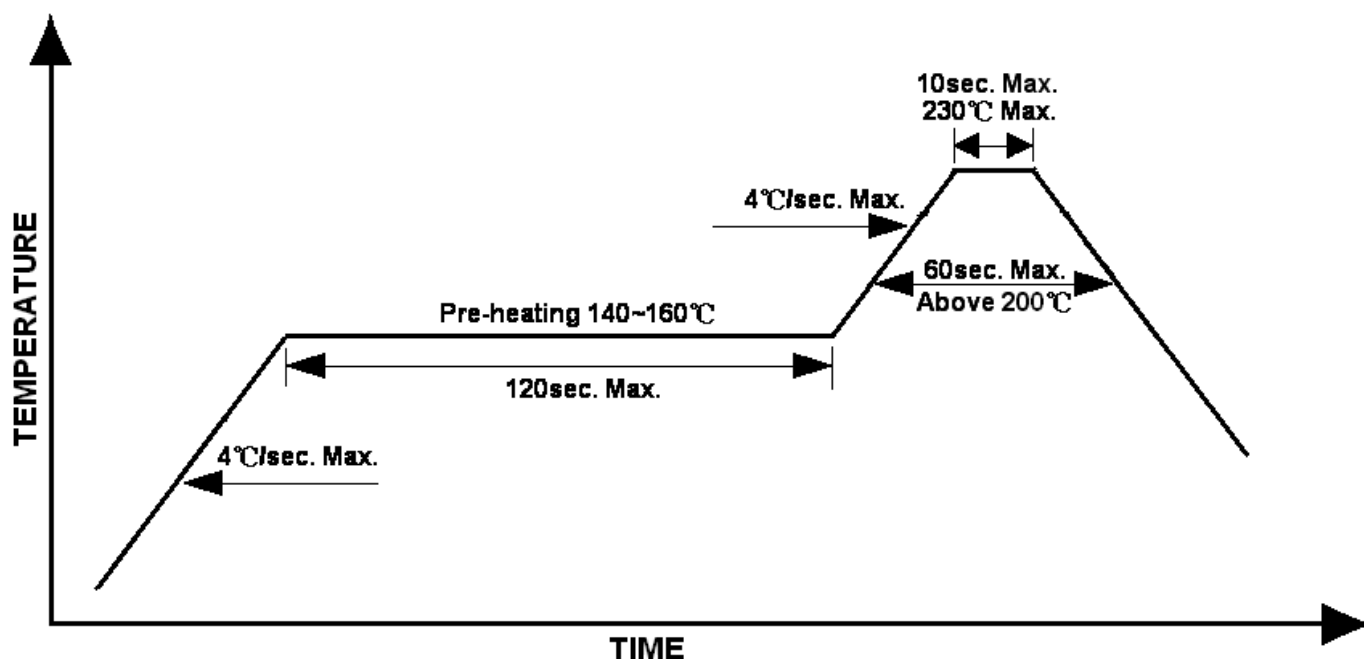

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 12/13

Lead-free Solder

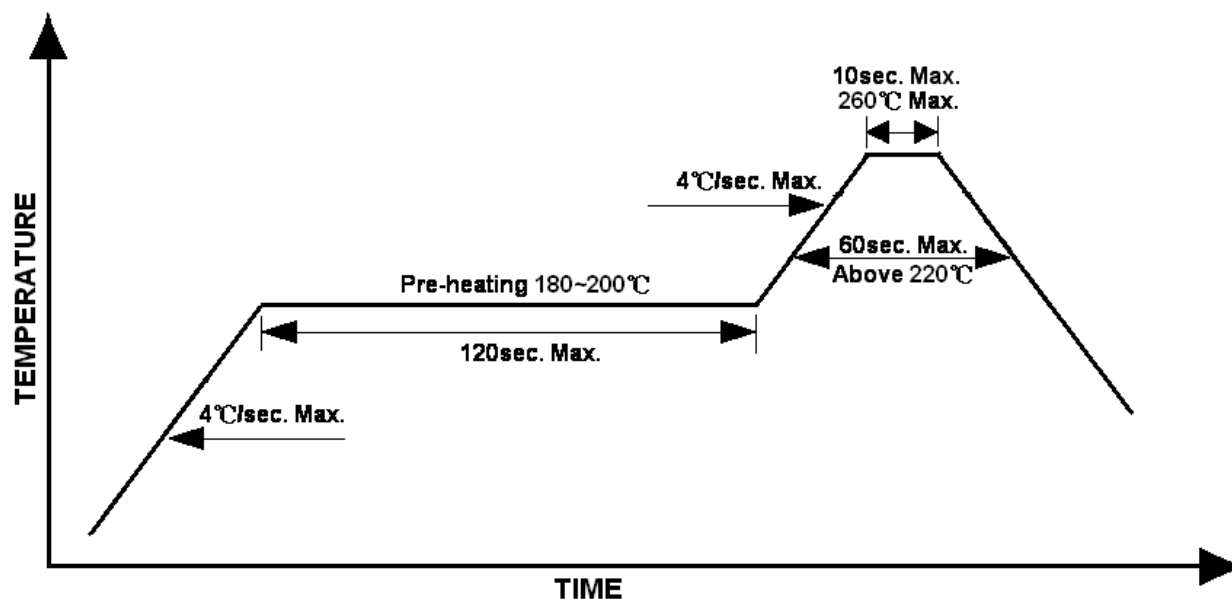

## Rework

- ♦ Customer must finish rework within 5 sec. under  $260^{\circ}\text{C}$ .
- ♦ The head of iron cannot touch copper foil.
- ♦ Twin-head type is preferred.

## Cleaning

- ♦ The conditions of cleaning after soldering:
- ♦ An alcohol-based solvent such as Isopropyl Alcohol (IPA) is recommended.
- ♦ Temperature $\times$ Time:  $<50^{\circ}\text{C}\times 30\text{sec}$ , or  $<30^{\circ}\text{C}\times 3\text{min}$
- ♦ Ultra sonic cleaning:  $< 15\text{W/ bath}$ ; Bath volume: 1liter max.
- ♦ Curing:  $100^{\circ}\text{C max}$ ,  $<3\text{min}$

## Cautions of Pick and Place

- ♦ It should be avoided to load stress on the resin during high temperature.
- ♦ Avoid rubbing or scraping the resin by any object.
- ♦ Electric-static may cause damage to the component. Please confirm that the equipment is grounding well. Using an ionizer fan is recommended.

Official Product	HT Part No. HT-150HQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K197
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17, 2005	Version of 1.0	Page 13/13