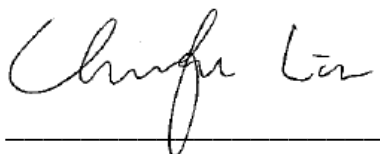


Harvatek Surface Mount CHIP LEDs Approval Sheet**Model No.: HT-150YQ****Acknowledged by****Section Manager**
Production Engineering Dept.**Manager**
Production Engineering Dept.

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 1/12

INTRODUCTION.....	3
PRODUCT SPECIFICATION.....	4
LABEL SPEC.:	5
PRODUCT FEATURE.....	7
ELECTRO-OPTICAL CHARACTERISTICS	7
PACKAGE OUTLINE DIMENSION AND RECOMMENDED SOLDERING PATTERN FOR REFLOW SOLDERING.	7
ABSOLUTE MAXIMUM RATINGS	7
CHARACTERISTICS.....	8
PACKAGING TAPE, REEL, AND PACKING MODEL	9
TAPE DIMENSION.....	9
REEL DIMENSION	9
PACKING MODEL	10
DRY PACK.....	10
CAUTIONS OF PICK AND PLACE	11
PRECAUTIONS.....	11
REFLOW SOLDERING	11
REWORK.....	12
CLEANING	12
CAUTIONS OF PICK AND PLACE	12

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 2/12

Introduction

- *The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by HARVATEK for any infringements of intellectual property or other rights of the third parties which may result from it use.*
- *Harvatek is continually effort to improve the quality of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing HARVATEK products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such HARATEK products cause loss of human life, bodily injury or damage to property.*
- *The HARVATEK products listed in this document are intended for usage in general electronics (computer, personal equipment, office equipment, industrial robotics, domestic, etc...) These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury.*
- *In developing your designs, please ensure that HARVATEK products are used within specified operating ranges as set forth in the most recent HARVATEK products specifications.*
- *Also, please keep in mind the precautions listed in this document.*

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 3/12

Product Specification

	Specification	Material	Quantity
Iv	45-180 mcd @20mA/ Ta= 25° C Tolerance: ± 10%		
Lambda(λ _D)	584.5-594.5nm @20mA/ Ta= 25° C Tolerance: ± 0.5nm		
Vf	1.8-2.3 V @20mA/ Ta= 25° C Tolerance: ± 0.05V		
Ir	< 100 μA @ V _R = 5 V		
Resin	Milky Diffused	Epoxy resin	
Carrier tape	According to EIA 481-1A specs	Conductive tape	3000pcs per reel
Reel	According to EIA 481-1A specs	Plastic/ White	
Label	HT standard	Paper	
Packing bag	220x240mm	Aluminum laminated bag/ no-zipper	One reel one bag
Carton	HT standard	Paper	Non-specified

Others:

Every mid-box will be loaded 5 reels. These 5 reels can be different in lot, Iv, lambda, or Vf. Every reel will have an independent label to identify its specification and the mid-box there will have a corresponding label post on it.




ESD protection for GaP and AlGaAs chips are still necessary even though they are safety in low static-electric discharge. Material in AlInGaP, GaN, or/and InGaN chips are **STATIC SENSITIVE device**. ESD protection shall be considered and taken in the initial design stage.

If manual work/process is needed, please ensure the device is well protective from ESD within all the process.

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 4/12


Label Spec.:

HARVATEK			Date: yyyy/mm/dd
CUSTOMER P/N: 			
HARVATEK P/N: 		QTY: PCS 	
LOT NO: 		QC	
IV BIN:	COLOR BIN:	VF:	

■ Customer P/N: To Be Defined

■ Harvatek P/N

H T - 1 5 0 YQ



Series Name	Emitting Color
HT-150: 3.2x1.6x1.1mm	YQ: Ultra Bright Yellow

■ Lot No.

1 2 3 4 5 6 7 8 9 10
P 1 2 2 3 0 A - D T

Code 1	Code 2	Code 3	Code 4, 5	Code 6, 7	Code 9	Code 10
	Mfg. Year	Mfg. Month	Mfg. Date	Lots	Resin Color	Packaging
Internal Tracing Code	Z: 2000 1: 2001 2: 2002 3: 2003	1: Jan. 2: Feb. 9: Sep. A: Oct. B: Nov. C: Dec.	1~31/ (30)	01~99, A,B,C...	D: Milky White	T: Taped Reel

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 5/12

■ Iv Bin:

Color	Bin Code	Spec. Range
Yellow	P1	45-56mcd
	P2	56-72mcd
	Q1	72-90mcd
	Q2	90-112.5mcd
	R1	112.5-140mcd
	R2	140-180mcd

■ Color Bin:

Color	Bin Code	Spec. Range
Yellow	B1	584.5-585.75nm
	B2	585.75-587nm
	C1	587-588.25nm
	C2	588.25-589.5nm
	D1	589.5-590.75nm
	D2	590.75-592nm
	E1	592-593.25nm
	E2	593.25-594.5nm

■ Vf Bin:

Color	Bin Code	Spec. Range
Yellow	-	1.8-2.3V

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 6/12

Product Feature

Electro-Optical Characteristics

(I_F @ 20mA, T_a 25 °C)

Code for parts	Lighting Color	Material	V_F (V)		λ (nm)			I_v (mcd)
			typ	max	λ_D	λ_P	$\Delta\lambda$	Typ
HT-150YQ	Ultra Bright Yellow	AlinGaP	1.9	2.3	591	593	15	90

Package Outline Dimension and Recommended Soldering Pattern for Reflow Soldering

Unit: mm Tolerance: +/-0.1

Outline Dim.	Soldering Pattern
1.Soldering terminal may shift in x, y direction.	

Absolute Maximum Ratings

(T_a 25 °C)


Series	P_d (mW)	I_F (mA)	I_{FP} (mA)	V_R (V)	T_{OP} (°C)	T_{ST} (°C)
HT-150YQ	46	20	80**	5	-30~+80	-40~+85

** Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width


Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 7/12

Characteristics


Forward Current vs. Ambient Temperature

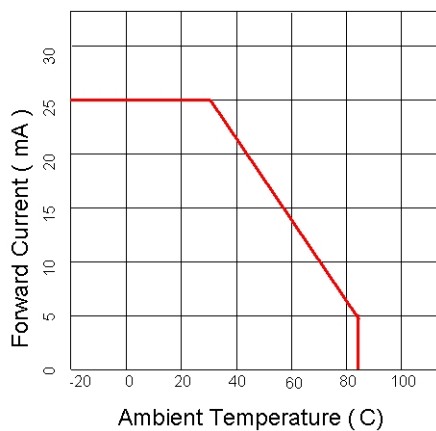


Forward Voltage vs. Forward Current

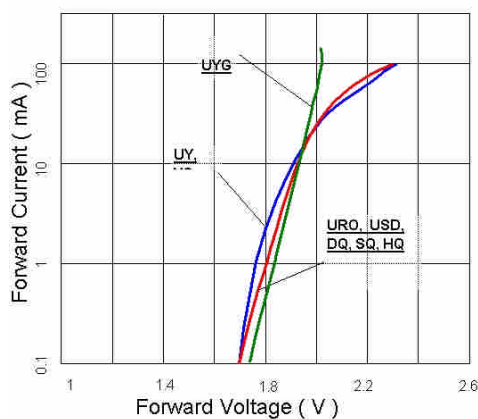


Relative Intensity vs. Forward Current

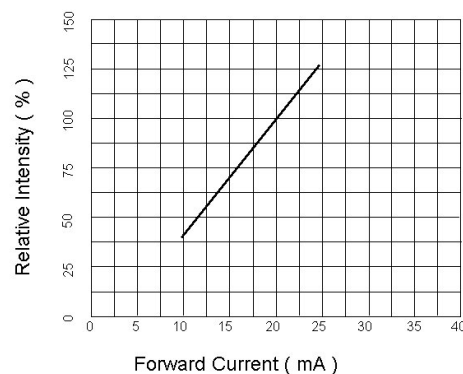


Relative Intensity vs. Ambient Temperature
Pulsed 20mA, 300us pulse, 10ms period

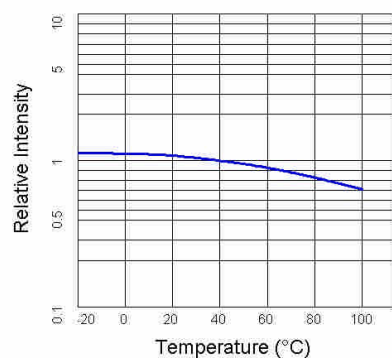


Relative Intensity vs. Wavelength

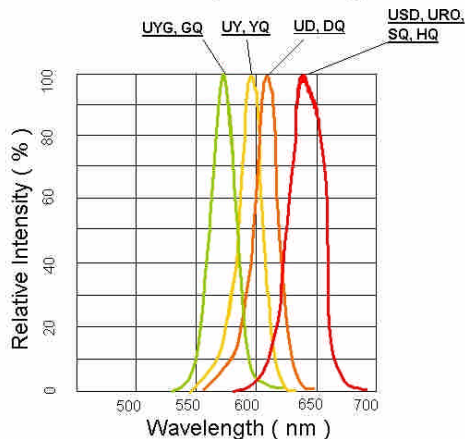

Directive Characteristics

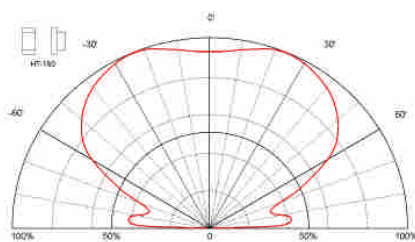


Directive Characteristics

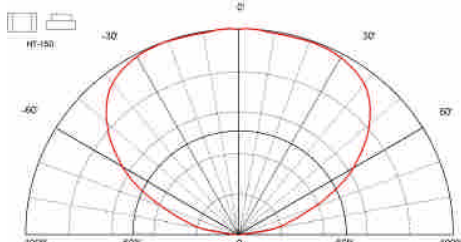

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 8/12


Packaging Tape, Reel, and Packing Model Tape Dimension

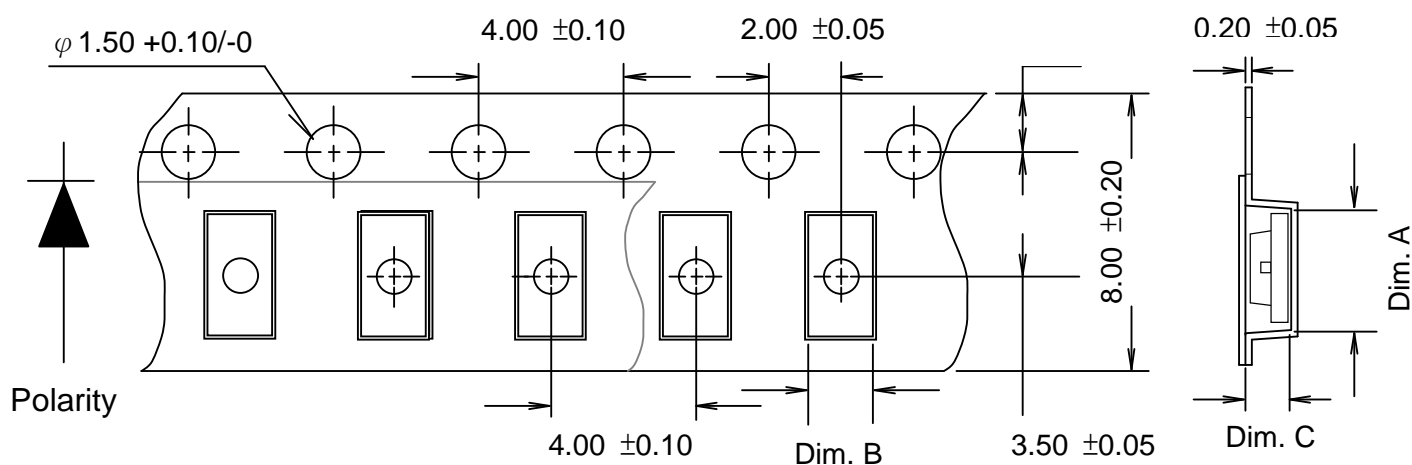

Part No.	Dim. A	Dim. B	Dim. C	Q'ty/Reel
HT-150	3.50 ± 0.10	1.88 ± 0.10	1.27 ± 0.10	3K


Unit: mm

Reel Dimension

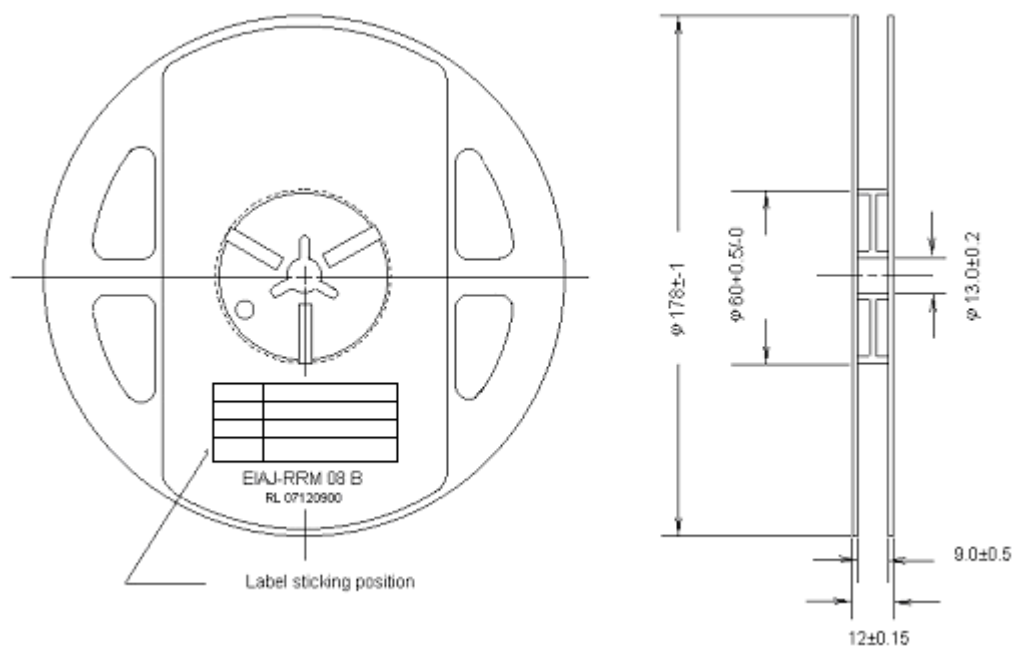

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 9/12

Packing Model

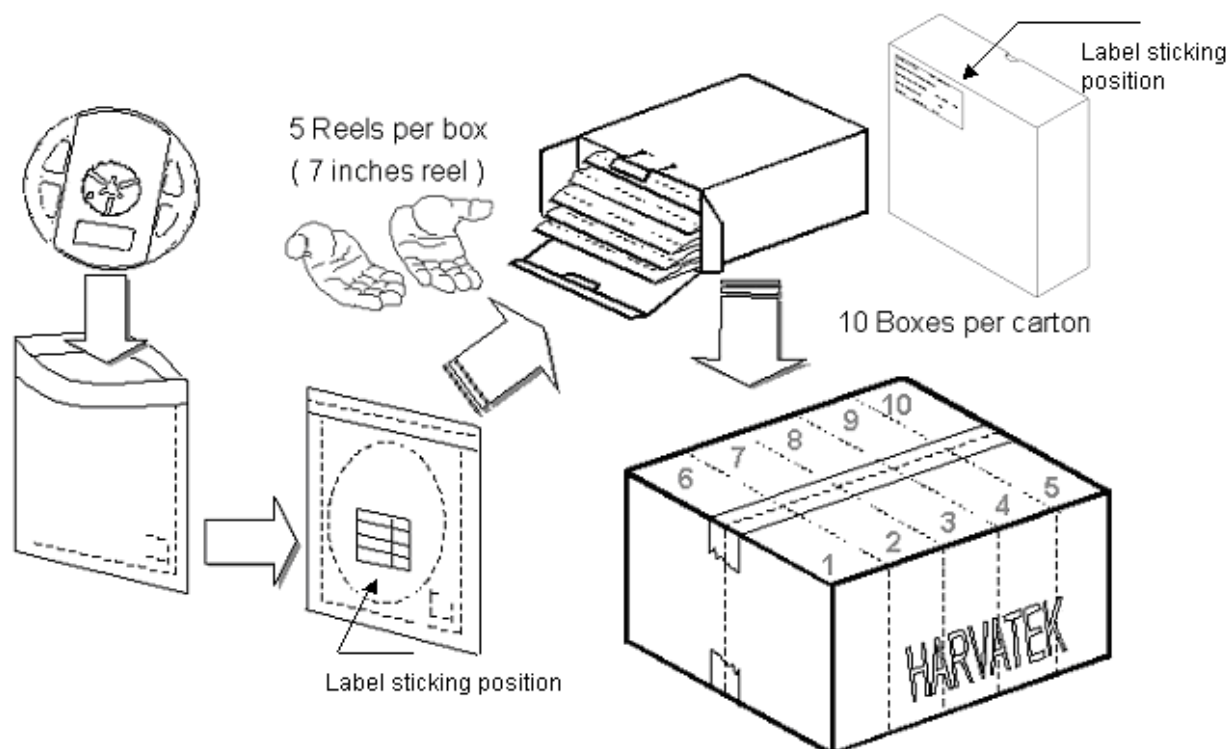


5 boxes per carton is available according to shipping quantity.

Dry Pack

Any SMD optical device, like this chip LED, is **MOISTURE SENSITIVE device**. Avoid absorbing moisture at any time during transportation or storage. Every reel will be packaged in the moisture barrier anti-static bag (Specific bag material will depend upon customers' requirement or option). And the bag is well sealed before shipment.

By customer's requirement, we will put a humidity indicator in each moisture barrier anti-static bag before shipment.

The package is the following:

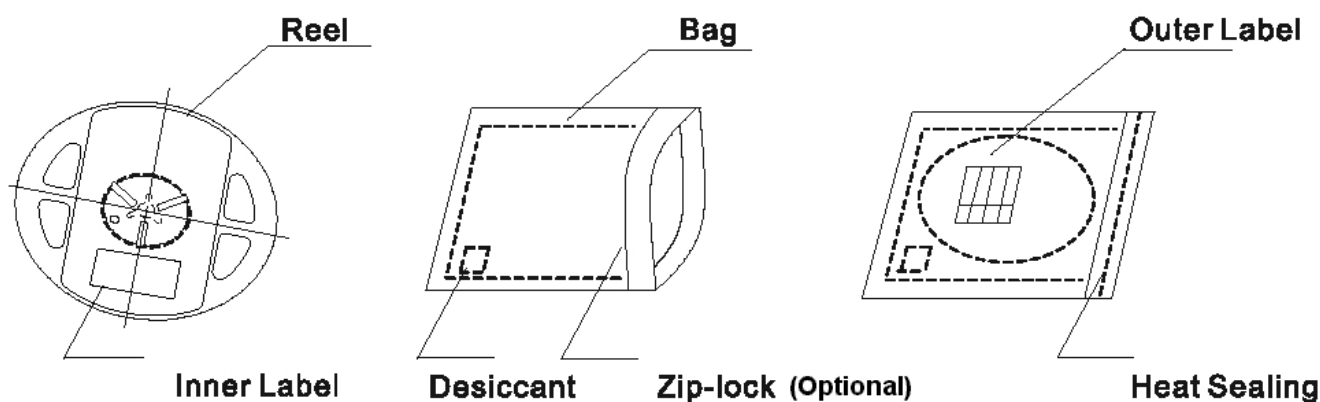

Official Product	HT Part No. HT-150YQ	Your Part No.	Data Sheet No.
Tentative Product	*****	*****	HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0
			Page 10/12

Cautions of Pick and Place

It should be avoided to load stress on the resin during high temperature.

Avoid rubbing or scraping the resin by any object.

Electric-static may cause damage to the component. Please confirm that the equipment grounding well. Using an ionizer fan is recommended.


PRECAUTIONS

1. Avoid absorbing moisture at any time during transportation or storage.
2. Anti-Static process is needed especially when handling GaN, InGaN, and AlInGaP products.
3. It is suggested to connect the unit with a proper series current limit resistor. Avoid driving reverse voltage over the specification of LEDs when turning the unit ON/OFF.
4. Any application should refer to the specifications of absolute maximum ratings.
5. Avoid any direct contact with the viewing area.
6. If possible, assemble the unit in a clean room or dust-free environment.

Reflow Soldering


- ◆ Recommend tin glue specifications:
Melting temperature: 178~192 °C
- ◆ Never take next process until the component is cooled down to room temperature after reflow.
- ◆ The recommended reflow soldering profile (measuring on the surface of the LED resin) is following:

Lead Solder

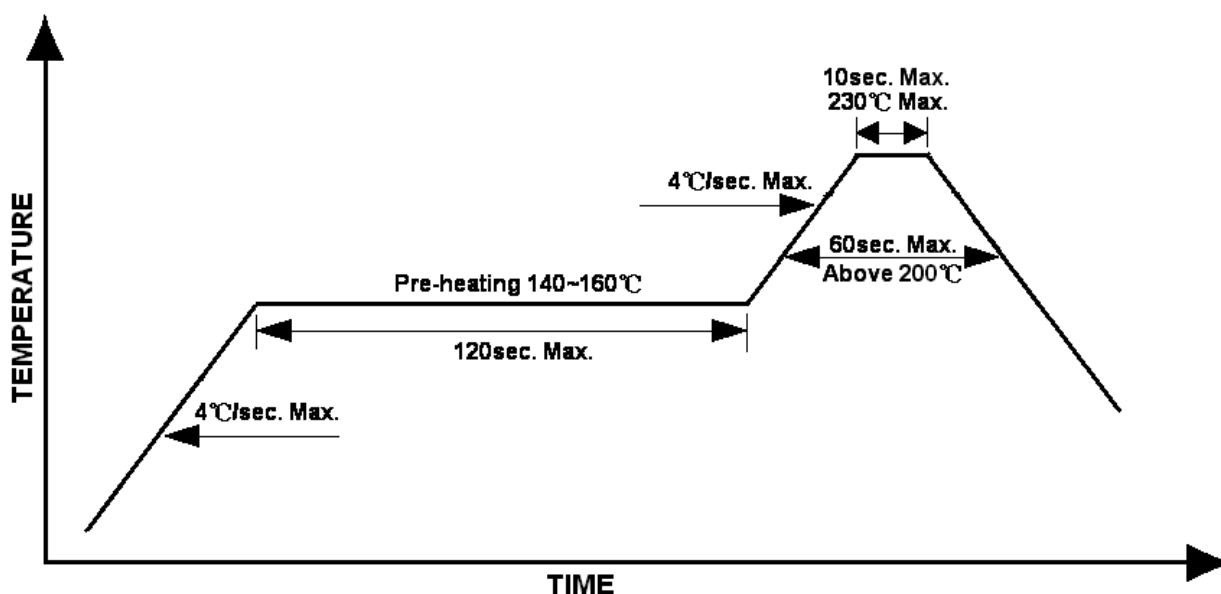

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 11/12

Lead-free Solder

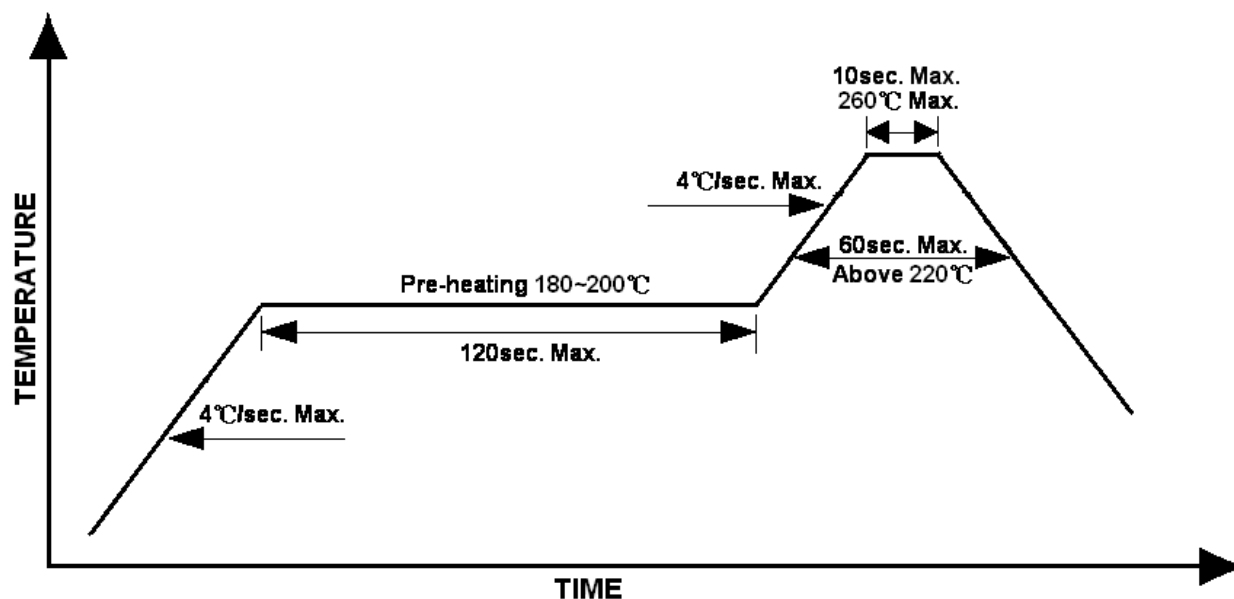

Rework

- ♦ Customer must finish rework within 5 sec. under 260 °C.
- ♦ The head of iron cannot touch copper foil.
- ♦ Twin-head type is preferred.

Cleaning

The conditions of cleaning after soldering:

An alcohol-based solvent such as isopropyl alcohol (IPA) is recommended.

Temperature×Time: <50 °C×30sec, or <30 °C×3min

Ultra sonic cleaning: < 15W/ bath; Bath volume: 1liter max.

Curing: 100 °C max, <3min

Do not contact with component on the assembly board.

Cautions of Pick and Place

It should be avoided to load stress on the resin during high temperature.

Avoid rubbing or scraping the resin by any object.

Electric-static may cause damage to the component. Please confirm that the equipment grounding well. Using an ionizer fan is recommended.

Official Product	HT Part No. HT-150YQ	Your Part No.		Data Sheet No.
Tentative Product	*****	*****		HDS-150-K196
Specifications are subject to changes for improvement without advance notice. Proprietary data, drawings, and company confidential all rights reserved.		Jan-17,2005	Version of 1.0	Page 12/12